


MJPTN, PRE-INSULATED ALUMINIUM CONNECTOR

MJPTN pre-insulated connectors are designed for LV-ABC systems with neutral messenger. MJPTN is used on neutral conductor.

- Material: Al \geq 99.5%
- Insulation sheath is made of weather and UV resistant material.
- Clear markings on insulation sheath to indicate crimping die, crimping sequence and times, cross-section of conductor and stripping length.
- Cross-section of conductor can be easily identified by color code of elastomeric cap.
- Elastomeric caps and pre-filled silicone grease ensure superior waterproof.
- Stripping of cable insulation is required before insertion.
- Tested by dielectrical voltage of 6kV for 1 minute under water.
- Standard: EN 50483-4, NF C 33-021

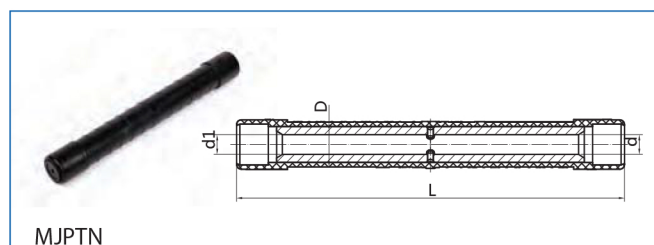

MJPTN

Type	Conductor Size (mm ²)	Dimensions(mm)				Color Code	Pack (pcs)	Crimping Die
		L	d	D	d1			
MJPTN25/25	25	173.5	6.5	20	6.5	orange	40x4	E173
MJPTN35/35	35	173.5	7.6	20	7.6	red	40x4	E173
MJPTN50/50	50	173.5	8.8	20	8.8	yellow	40x4	E173
MJPTN54.6/54.6	54.6	173.5	10.2	20	10.2	black	40x4	E173
MJPTN54.6/70	54.6/70	173.5	10.2	20	10.6	black/white	40x4	E173
MJPTN70/70	70	173.5	10.6	20	10.6	white	40x4	E173
MJPTN95/95D	95	175.5	13.3	24.6	13.3	grey	24x4	E215