

TENSION CLAMP

NLL




Test Standard: IEC 61284

NLL APPLICATION

NLL tension clamp is applicable for aerial lines up to 30kV and below overhead transmission lines which is used for fixing aluminum cable or steel core aluminum cable on the strain pole. And the cables should be stripped of insulation before insertion. NLL is made of high strength and corrosion resistant casting aluminum alloy which can be used in various climatic conditions.




NLL DESIGN

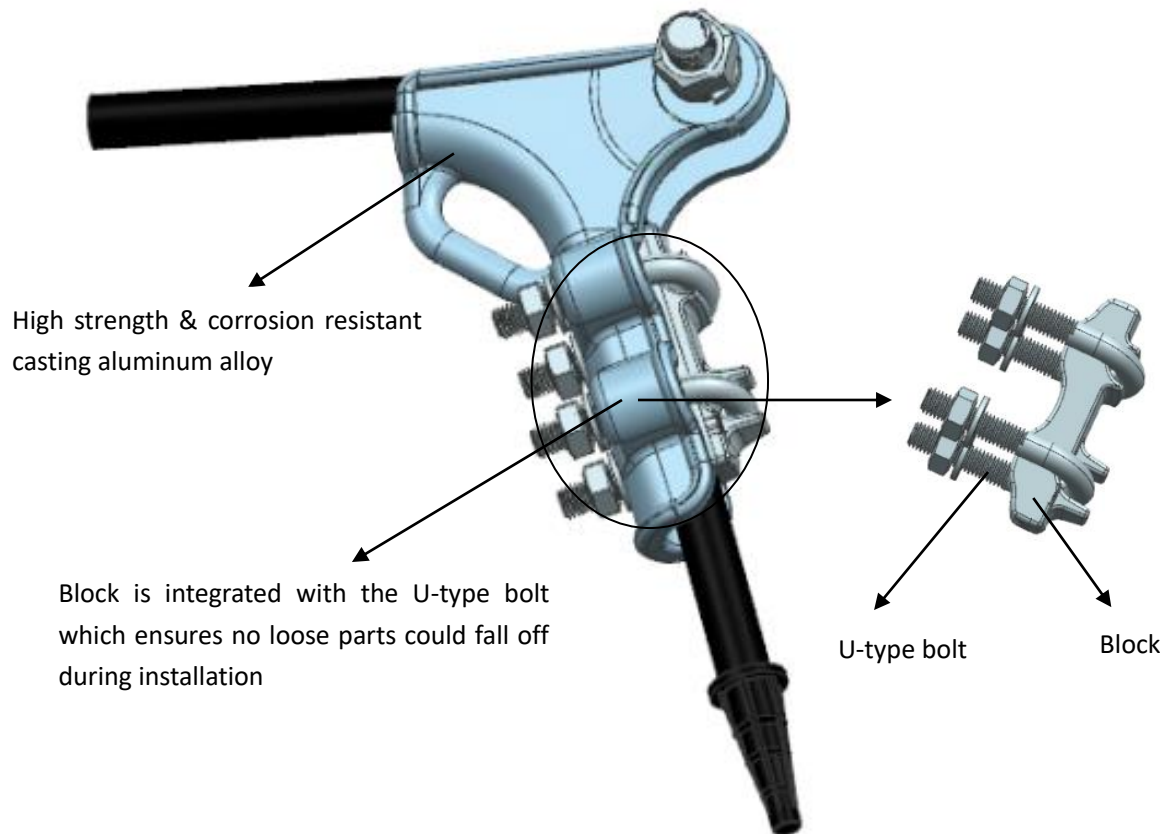

Key Feature:


1. Easy and efficient installation
2. No loose parts
3. Long service life
4. Energy saving design

TYPE SELECTION

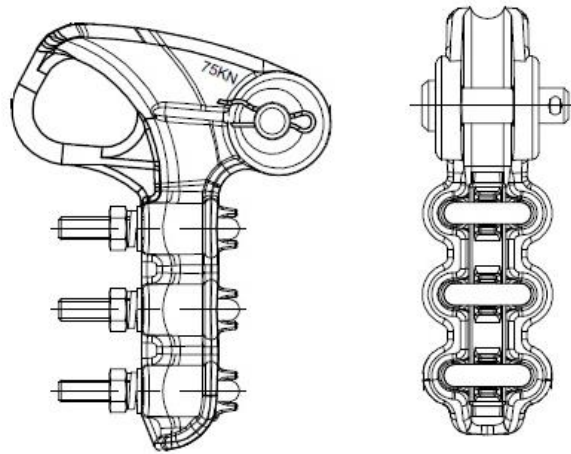

Type	Conductor Size (mm ²)	U-Bolts	Failure Load (kN)	Pack (pcs)
NLL5.0-10.0	5.0-10.0	2	40	40
NLL9.0-16.0	9.0-16.0	3	75	16
NLL16.0-20.0	16.0-20.0	4	100	6

PARTS OPTION

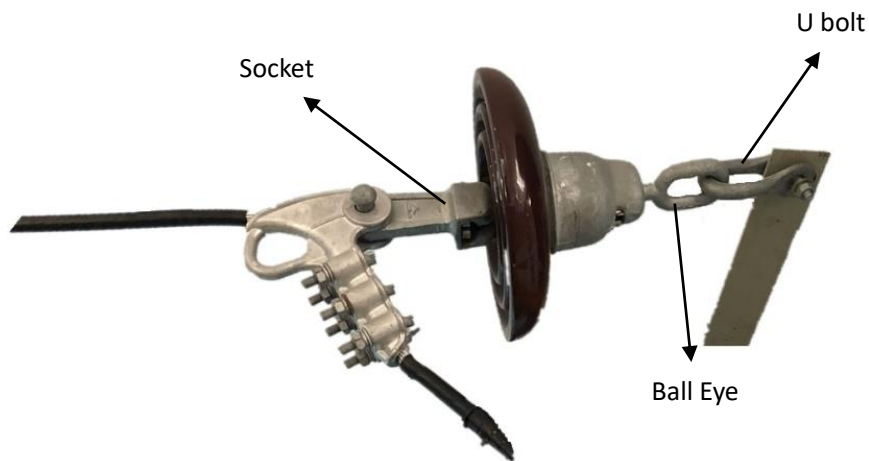

Type	Ball Eye	Socket	U bolt
NLL9.0-16.0	QH-7	W-7B	U-7
NLL9.0-16.0	Q-7U	W-7A	VB-7A
NLL16.0-20.0	Q-10U	W-10A	VB-10A
NLL16.0-20.0	QH-10	W1-10	U-10