

RJ-U, CABLE LINK

Application:


Used for intermediate connection of copper cables in medium voltage.

Material: Cu ≥ 99.9%

Feature:

- Oil blocking structure
- Clear markings on barrel to indicate correct crimping location.

Standard: NF C 33-090

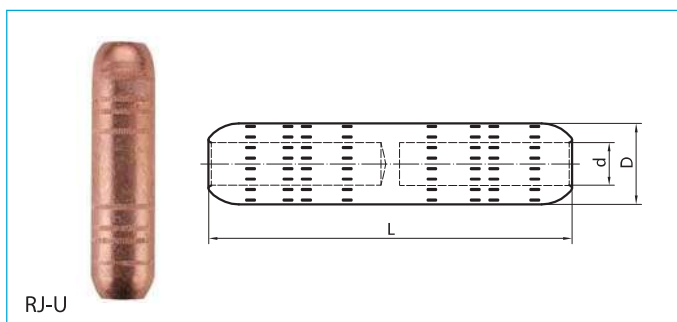

Type	Conductor Size (mm ²)	Dimensions			Pack(pcs)	Crimping Die
		L(mm)	d(mm)	D(mm)		Hex
RJ-U35	35	95	8.5	20	40x4	E173
RJ-U50	50	95	9.8	20	40x4	E173
RJ-U70	70	95	11	20	40x4	E173
RJ-U95	95	95	13	20	40x4	E173
RJ-U120	120	102	14.2	25	25x4	E215
RJ-U150	150	102	16	25	25x4	E215
RJ-U240	240	102	20	32	15x4	-
RJ-U300	300	102	23	32	-	-
RJ-U500	500	162	30	40	-	-