

RJ-XA, ALUMINIUM CONNECTOR

Application:


Used for intermediate connection of aluminium cable and aluminium alloy cable in medium voltage.

Material: Al ≥ 99.5%

Feature:

- Oil blocking structure
- Clear markings on barrel to indicate correct crimping location.
- Prefilled with jointing compound.

Standard: NF C 33-090

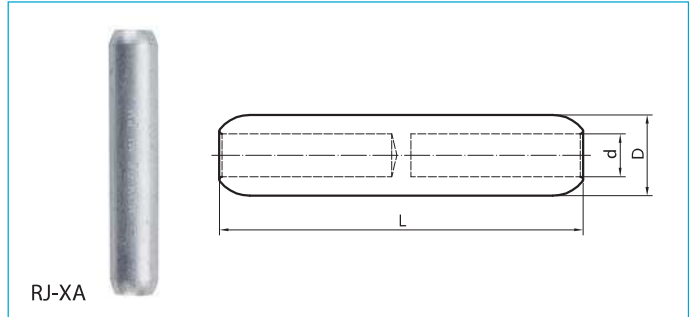

Type	Conductor Size (mm ²)	Dimensions			Pack(pcs)	Crimping Die Indent
		L(mm)	d(mm)	D(mm)		
RJ-0A-16	16	90.5	5.5	16	80x8	MJ 0E-0E
RJ-0A-25	25	90.5	6.5	16	80x8	MJ 0E-0E
RJ-0A-35	35	90.5	8	16	80x8	MJ 0E-0E
RJ-1A-50	50	106.5	9	20	80x4	MJ 1E-1E
RJ-1A-70	70	106.5	11	20	80x4	MJ 1E-1E
RJ-1A-95	95	106.5	12.5	20	80x4	MJ 1E-1E
RJ-2A-120	120	133	13.7	25	40x4	MJ 2E-2E
RJ-2A-150	150	133	15.5	25	40x4	MJ 2E-2E
RJ-4A-185	185	143.5	17	32	16x4	MJ 4E-4E
RJ-4A-240	240	143.5	19.5	32	16x4	MJ 4E-4E
RJ-5A-300	300	218	23.3	40	8x4	MJ 5E-5E
RJ-5A-400	400	218	26	40	8x4	MJ 5E-5E
RJ-6A-500	500	218.5	29.1	47	-	MJ 6E-6E
RJ-6A-630	630	218.5	32.5	47	-	MJ 6E-6E