

U-T, "C" Type Connector

Application:


Used for intermediate connection of copper cables in low voltage.

Material: Cu ≥ 99.9%

Surface: tin plated

Feature:

- Internal surface is indented to improve tensile strength.
- Chamfered mouth to protect conductor from damage.

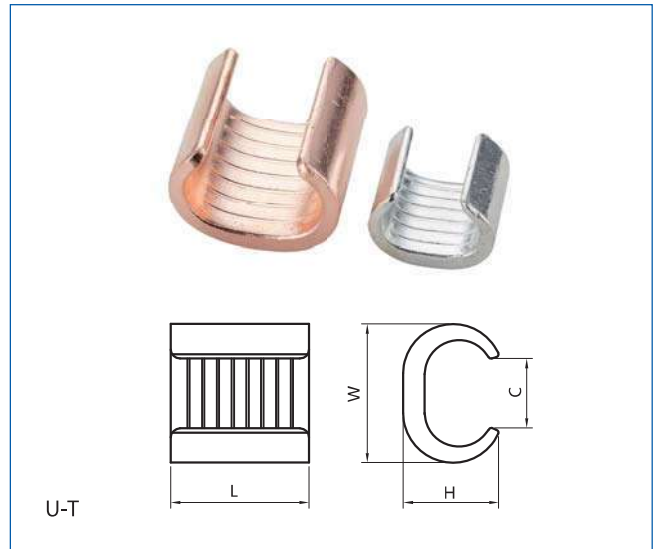

Type	Conductor Size (mm ²)	Dimensions				Pack(pcs)
		L(mm)	H(mm)	W(mm)	C(mm)	
U-T44	27-44	20	14	19	8.3	360X4
U-T60	45-60	22.5	15	21.4	10.8	280X4
U-T76	61-76	22.5	17	24	9.5	200X4
U-T98	77-98	25	19	28	14.5	140X4
U-T122	99-122	26	21	29.3	14	140X4
U-T154	123-154	28	25	35	17	80X4
U-T190	155-190	35	25	36.5	17	75X4
U-T240	191-240	40	29	40	20	50X4
U-T288	241-288	45	32	44	22	36X4
U-T365	289-365	50	34	48	27.5	30X4
U-T450	366-450	60	41	56.5	28	16X4